FRONT SIDE MEMBER (CUT-H)

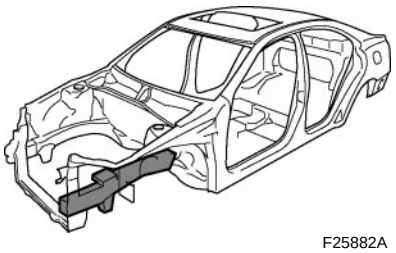

F25882A

With the front fender apron and cowl top side reinforcement removed.

Symbol meaning

: Remove Weld Points

F25882B

REMOVAL

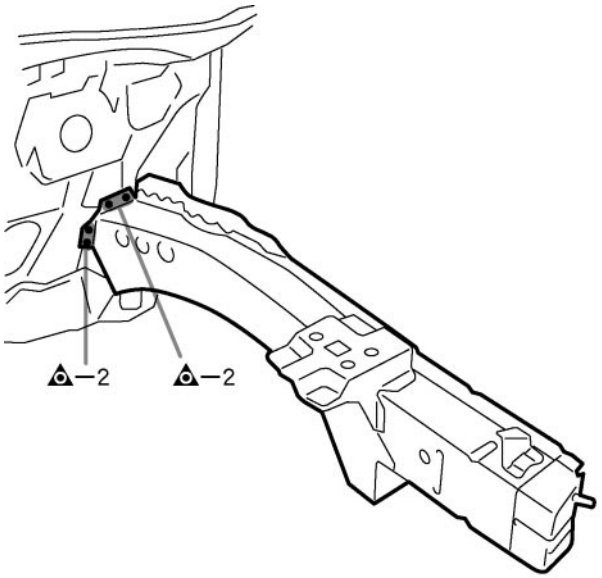

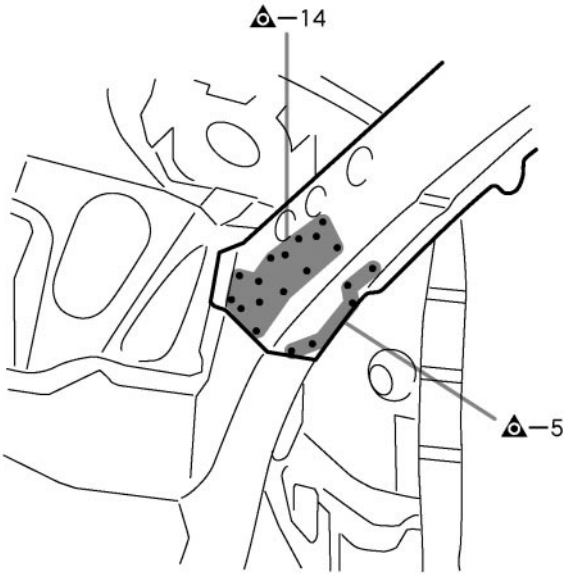

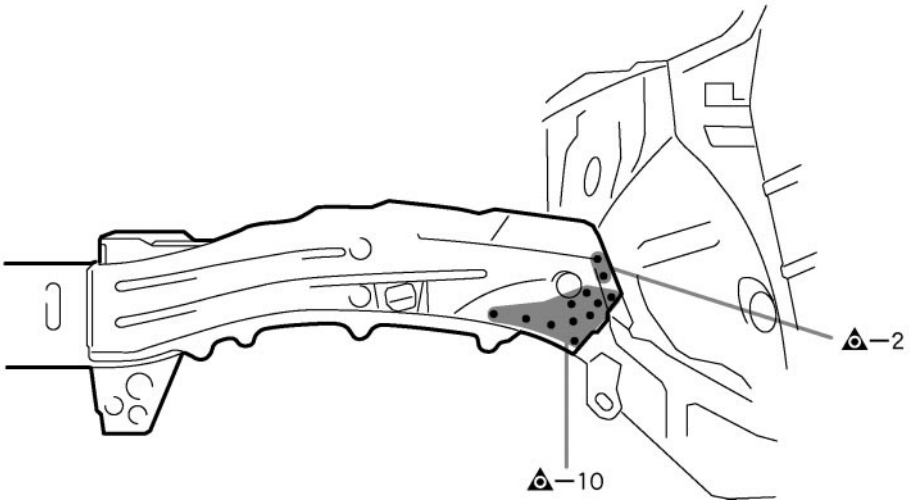

F25882

Symbol meaning

: MIG Plug Weld

F25883B

INSTALLATION

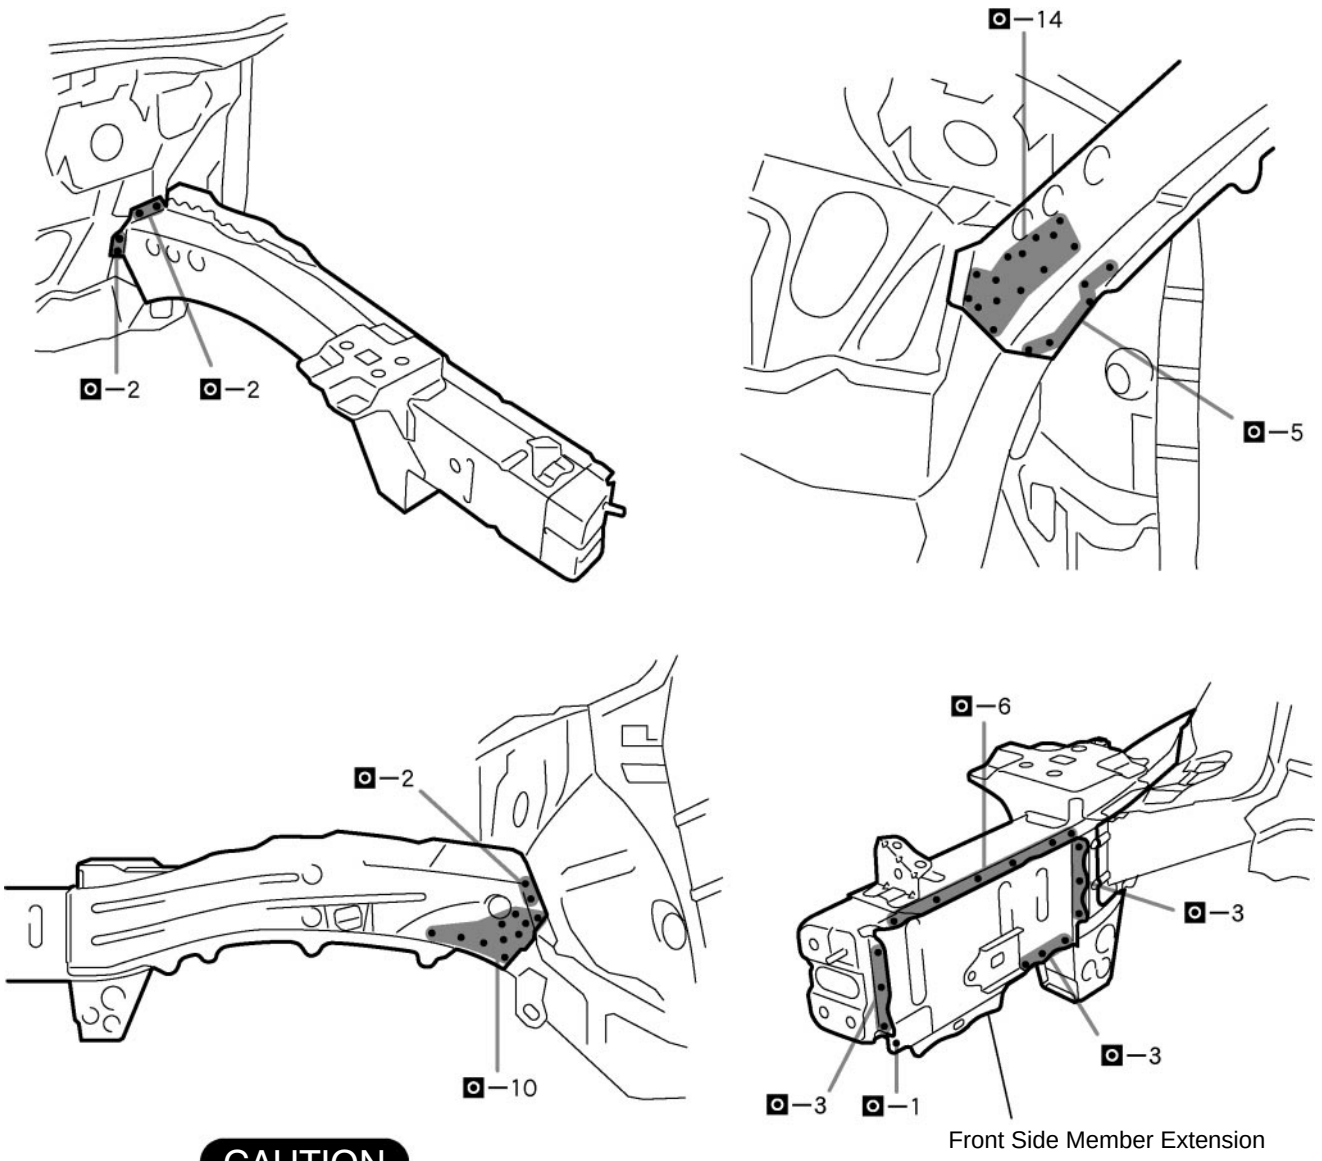

Front Side Member Extension

CAUTION

Make sure to attach correctry in accordance with the body dimention diagram as this parts affects the front wheel alignment.

F25883

INSTALLATION POINT

1 Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
2 After welding, apply body sealer and undercoating to the corresponding parts. (See the paint·coating)
3 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.